

BRUCE 布鲁斯

BRUCE 布鲁斯


400-8890-100
www.chinabruce.cn



V5

小方头高速电脑绷缝机

High speed computerized cylinder-bed interlock

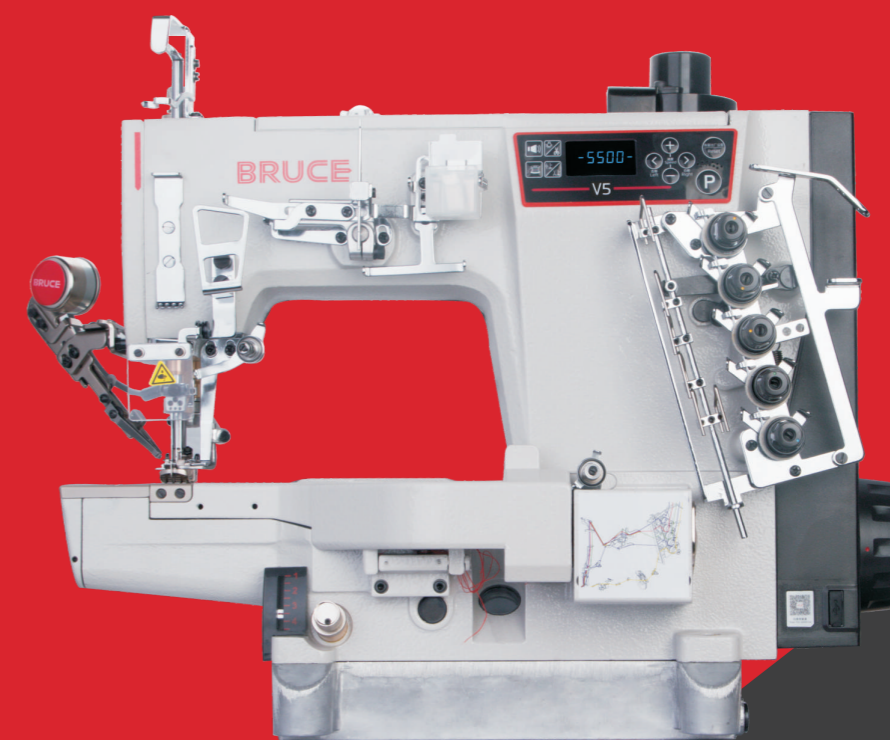

怕跳针 · 怕断线 · 就用布鲁斯
NO BREAK · NO SKIP

台州市布鲁斯缝制设备有限公司
TaiZhou Bruce Sewing Machine Co., Ltd.
浙江省台州市椒江区东海大道东段1008号2号楼
No.2 building No.1008 Eastern Section East Sea Road Jiaojiang
District Taizhou, Zhejiang.

2020.07



怕跳针 · 怕断线 · 就用布鲁斯
NO BREAK · NO SKIP

V5


品名：小方头高速电脑绷缝机
 High speed computerized cylinder-bed interlock



缝纫轻快、高效增收
 High speed, high efficiency

最高转速可达5500转，起缝只要200ms即可达到最高转速，缝纫轻快，且缝制完成后自动剪线自动抬压脚，出活快、效率高。

Highest speed can reach to 5500 rpm, from 0 to highest speed only take 200ms, easy and fast to operate, with auto trimming and presser foot lifter guarantee the high efficiency and output.

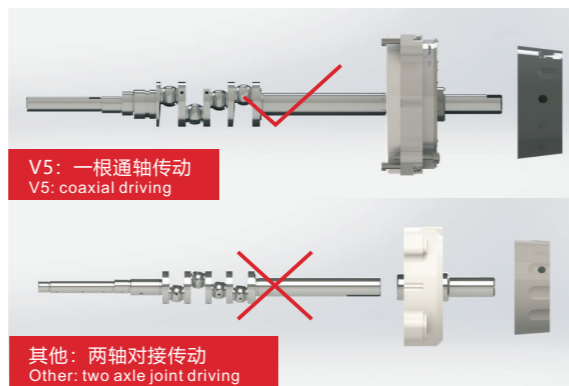


V5: 一根通轴传动
 V5: coaxial driving

其他: 两轴对接传动
 Other: two axle joint driving

通轴传动，轻快稳定
 Coaxial driving, stable and reliable

降低整机力矩，机器运行稳定轻快，更经久耐用。
 Reduce machine torque, make the sewing fast, stable and durable.

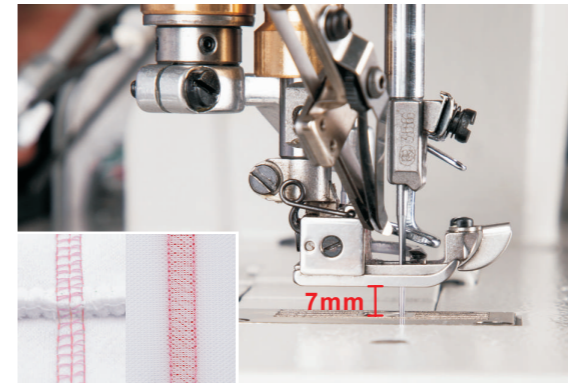


过厚顺畅、缝薄不起皱

From light to heavy duty, beautiful stitches

适合筒形面料的缝制，过骨位顺畅，线迹均匀美观不变密，车缝网纱等薄料时不起皱。

Suit for cylindrical fabric, smoothly sewing from light to heavy duty with beautiful stitches, no fabric gathering even for yarn sewing.

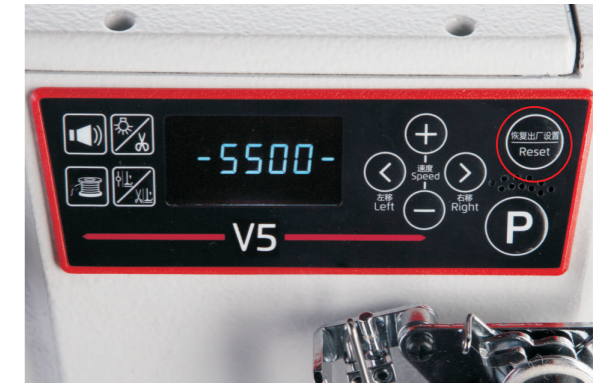

一键还原，操作无忧

One key to reset, easy operation

一键恢复出厂设置，更加人性化，不必为按错而烦恼。

One key to factory reset, more humanized.

技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
					(mm)			(mm)	(S.p.m)	(mm)	NW/GW	(kg)
V5-UT2-01GB	基本缝 Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62	
V5-UT2-02BB	滚领缝 Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62	
V5-UT2-03GB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62	
V5-UT2-08AC	下摆折边缝 Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62	
V5-UT2-35AC	下摆折边缝(左刀) Bottom Hemming(left-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5000	670×445×720	53/65	
V5-D-01GB	基本缝 Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56	
V5-D-02BB	滚领缝 Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56	
V5-D-03GB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56	
V5-D-08AC	下摆折边缝 Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56	
V5-D-35AC	下摆折边缝(左刀) Bottom Hemming(left-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5000	670×445×720	47/59	

注 (Note) :

- 1、UT2代表电脑车，不标配上剪线刀，D代表直驱机
 1. UT2: computerized type without upper cutter, D: direct drive type
- 2、电脑车还可选配UT款，标配上剪线刀。
 2. UT: computerized type with upper and lower cutter